


Jaw联轴器
Jaw Coupling

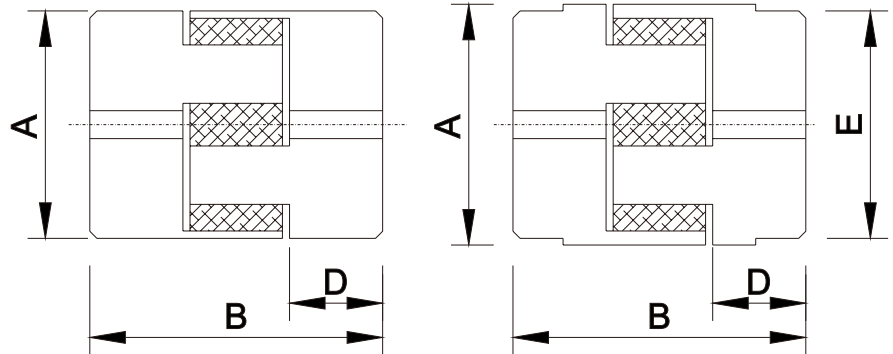

Type 1

Type 2

规格 Size	型式 Type	A	B	D	E	标准孔 Std bore	公制孔径/Bore metric		英制孔径/Bore inch	
							最小/Min	最大/Max	最小/Min	最大/Max
L035	1	16	20.5	6.6	--	3	3	8	1/8"	3/8"
L050	1	28	43.2	15.6	--	6	5	15	3/16"	5/8"
L070	1	35	50.8	19.0	--	9	7	19	3/16"	3/4"
L075	1	45	54.7	21	--	9	9	25	3/16"	1"
L090	1	54	54.7	21	--	9	9	28	3/16"	1 1/8"
L095	1	54	63.7	25.5	--	9	9	28	3/8"	1 1/8"
L099	1	64.5	72.5	27	--	12	12	35	7/16"	1 3/8"
L100	1	64.5	88.5	35	--	12	12	35	7/16"	1 3/8"
L110	1	85	108	43	--	15	15	48	1/2"	1 7/8"
L150	1	96	115.4	45	--	15	15	48	5/8"	1 7/8"
L190	2	115	133.4	54	101.6	19	19	55	5/8"	2 1/4"
L225	2	127	153.4	64	108	19	19	65	3/4"	2 5/8"



Material:NBR
材料:丁晴橡胶

Temperature °C:40~100°C
温度范围 °C:-40~100°C



Material:Urethane
材料:聚氨酯

Temperature °C:-35~70°C
温度范围 °C:-35~70°C



Material:Hytrel
材料:杜邦

Temperature °C:-50~120°C
温度范围 °C:-50~120°C